

D2J Series


High Temperature, 2 Socket MIL-Spec Connector with Backshell,
Permanent Mount, 350 °F (177 °C) Max Temp



VIBRATION ANALYSIS HARDWARE

Product Features

- ▶ 2 Socket Connection
- ▶ 350 °F Max Temp
- ▶ IP66 Rated

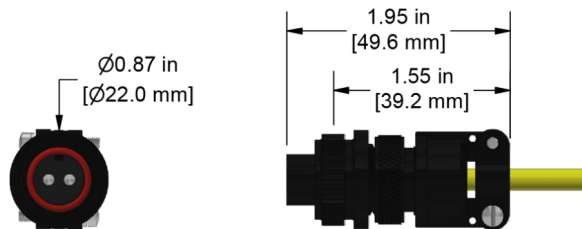

Specifications

Application	Portable Measurements, Permanent Mount
Max Temperature	350 °F (177 °C)
Connector Type	2 Socket MIL-Spec
Shell Material	Aluminum Alloy Shell
Connector Insert Material	Diallyl Phthalate
Rating	IP64
Pin-Out	A=Signal (+) B=Common (-)

Built to Order

Backed by our Unconditional Lifetime Warranty

www.ctconline.com | sales@ctconline.com | 585-924-5900