

D3C Series




VIBRATION ANALYSIS HARDWARE

3 Socket MIL-Spec Connector with Custom Molded Polyurethane Strain Relief, Portable Measurement, 250 °F (121 °C) Max Temp

Product Features

- ▶ TNC Connector
- ▶ Epoxied
- ▶ IP66 Rated

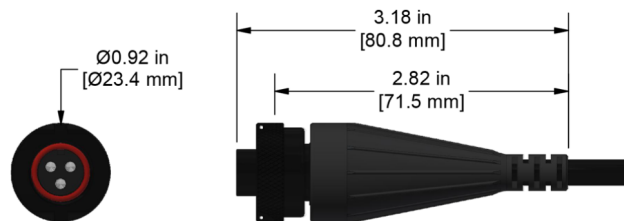

Specifications

Application	Portable Measurements
Max Temperature	250 °F (121 °C)
Connector Type	3 Socket MIL-Spec
Shell Material	Polyurethane
Connector Insert Material	Neoprene
Pin-Out	A = Signal (+) B = Common (-) C = Signal (+)

Built to Order

Backed by our Unconditional Lifetime Warranty

www.ctconline.com | sales@ctconline.com | 585-924-5900