

# D3CB Series




VIBRATION ANALYSIS HARDWARE

3 Socket MIL Connector with Rubber Bending Strain Relief, Wired as X and Z Entry, Portable Measurements, 250 °F (121 °C) Max Temp

## Product Features

3 Socket Connector for use with Biaxial  
AC9300/9301/9302/9303/9304/9305/9306/9307/9308/9309/9310/9311/9312/9313/9314/9315/9316/9317/9318/9319/9320/9321/9322/9323/9324/9325/9326/9327/9328/9329/9330/9331/9332/9333-IV Sensors

Custom Bendable Polyurethane Strain Relief

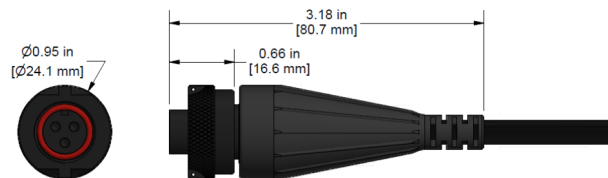

## Specifications

Application	Portable Monitoring
Max Temperature	250 °F (121 °C)
Connector Type	3 Socket MIL
Strain Relief	Molded Polyurethane
Shell Material	Steel
Connector Insert Material	Neoprene
Rating	IP66
Pin-Out	Pin A: X Axis (+) Pin B: Z Axis (+) Pin C: Common (-)

**Built to Order**

Backed by our Unconditional Lifetime Warranty

[www.ctconline.com](http://www.ctconline.com) | [sales@ctconline.com](mailto:sales@ctconline.com) | 585-924-5900