

D3D Series




VIBRATION ANALYSIS HARDWARE

3 Socket MIL-Spec Right-Angle Connector, Polyurethane Molded,
Portable Measurement, 250 °F (121 °C) Max Temp



Product Features

- ▶ 3 Socket Connection
- ▶ Polyurethane Molded
- ▶ IP66 Rated

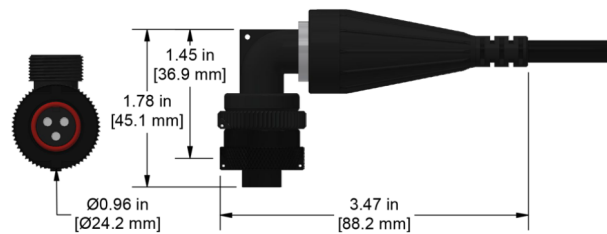

Specifications

Application	Portable Measurements
Max Temperature	250 °F (121 °C)
Connector Type	3 Socket Right-Angle MIL-Spec Connector
Shell Material	Polyurethane
Connector Insert Material	Neoprene
Rating	IP64
Pin-Out	A = Signal (+) B = Common (-) C = Signal (+)

Built to Order

Backed by our Unconditional Lifetime Warranty

www.ctconline.com | sales@ctconline.com | 585-924-5900