

# E4D Series



VIBRATION ANALYSIS HARDWARE

4 Channel BNC Jack Connector, Polyurethane Molded, Compatible with 0.25 in. (6.4 mm) OD Cable Diameters, 250 °F (121 °C) Max Temp




## Product Features

4 BNC Jacks to 1 Multi-Conductor Cable

Polyurethane Molded

- ▶ Labelled CHAN 1 (Red), CHAN 2 (Green), CHAN 3 (White), CHAN 4 (Blue)
- ▶ 250 °F (121 °C) Max Temp
- ▶ IP66 Rated

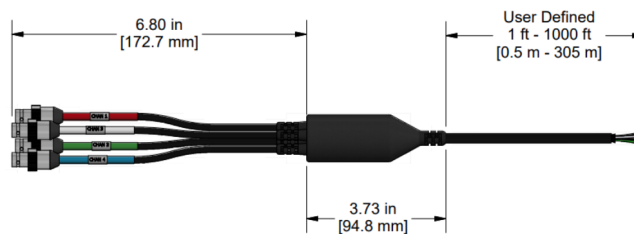

## Specifications

Application	Portable Measurements
Max Temperature	250 °F (121 °C)
Connector Type	BNC Jack
Strain Relief	Polyurethane
Shell Material	Brass Shell
Connector Insert Material	Beryllium Copper
Rating	IP66
Pin-Out	Pin = Signal (+) Case = Common (-)

**Built to Order**

Backed by our Unconditional Lifetime Warranty

[www.ctconline.com](http://www.ctconline.com) | [sales@ctconline.com](mailto:sales@ctconline.com) | 585-924-5900