

F2DA Series



VIBRATION ANALYSIS HARDWARE

2 Channel BNC Plug Connector for Dual Output Temperature and Vibration Sensors, Polyurethane Molded, 250 °F (121 °C) Max Temp




Product Features

2 BNC Plugs to 1 Multi-Conductor Cable

Polyurethane Molded

- ▶ Labelled ACCEL (Yellow), TEMP (Blue)
- ▶ 250 °F (121 °C) Max Temp
- ▶ IP66 Rated

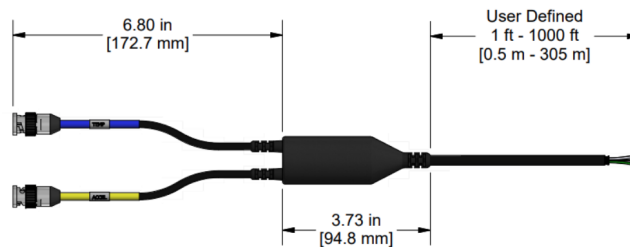

Specifications

Application	Portable and Permanent Measurements
Max Temperature	250 °F (121 °C)
Connector Type	BNC Plug
Strain Relief	Polyurethane
Shell Material	Brass Shell
Connector Insert Material	Beryllium Copper
Rating	IP66
Pin-Out	Pin = Signal (+) Case = Common (-)

Built to Order

Backed by our Unconditional Lifetime Warranty

www.ctconline.com | sales@ctconline.com | 585-924-5900