

J4L Series

4 Socket Mini-MIL, 303 Stainless Steel Hydraulic Hose Connector,
Permanent Mount, 212 °F (100 °C) Max Temp




VIBRATION ANALYSIS HARDWARE

Product Features

Compatible with CTC CB500 Series Hydraulic
Hose Protected Cabling

- ▶ 4 Socket Mini-MIL Connection for use with CTC Triaxial Sensors
- ▶ Designed to Withstand a Wide Variety of Industrial Applications
- ▶ 316L Stainless Steel Locking Ring for Added Durability and Corrosion Resistance

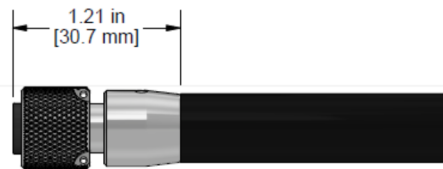

Specifications

Application	Permanent Monitoring
Max Temperature	212 °F (100 °C)
Connector Type	4 Socket Mini-MIL Hydraulic Hose
Shell Material	303 Stainless Steel
Connector Insert Material	Polycarbonate
Rating	IP68
Pin-Out	Socket A = Ch. Y (+), Red Conductor Socket B = Ch. X (+), Green Conductor Socket C = Ch. Z (+), White Conductor Socket D = Common (-), Black Conductor

Built to Order

Backed by our Unconditional Lifetime Warranty

www.ctconline.com | sales@ctconline.com | 585-924-5900