

# JB130 Standard Size

iBOX Triaxial Input & Output Vibration Switch Box, Fiberglass Enclosure, NEMA 4X (IP66) Rated, Sensor Input Options: 4 to 12 Triaxial Sensors



VIBRATION ANALYSIS HARDWARE




## Product Features

Fully featured vibration junction box with IEPE sensor condition indicator lights, and convenient interface with fold-forward panel for easy wiring.

Internally grounded for noise reduction

- ▶ Accepts up to 12 triaxial sensor inputs for a maximum of 36 channels of measurement
- ▶ Includes an IEPE bias indicator light to identify when data is to be collected or to show open and short circuit conditions
- ▶ Flip down panel allows for convenient wiring to terminal blocks

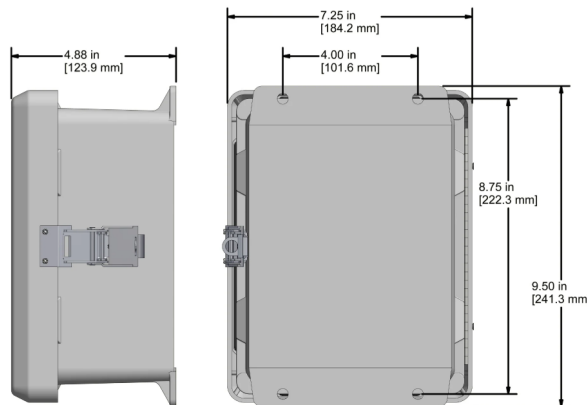

## Specifications

Temperature Range	-58 to 180 °F (-50 to 82 °C)
Enclosure Material	Fiberglass
Inputs	A, B, C, D, Shield
Outputs	3x BNC Jack and 4 Pin 'J'
Continuous Output	Multi-Pin Connector for Interface with Online Systems (requires JB933-1A)
Sensor Input Options	4, 6, 8, 10, 12
Rating	NEMA 4X (IP66)
Door Closure	Snap Latch
Dimensions	7.25 x 9.50 x 4.88 in. (184 x 241 x 124 mm)
Cord Grips	Optional
Switch	4 Pole
Bias Indicator	3 Channel
Resistance	Resistant to Hose Directed Fluid and Corrosion

## Ordering Information

JB	□ □ □	-	□ □ □	□
<b>Enclosure Type</b> <b>130</b> = Triaxial Fiberglass Enclosure <b>230</b> = Triaxial Stainless Steel Enclosure <b>330</b> = Triaxial Stainless Steel Enclosure, Sloped Top	<b>Channels</b> <b>4</b> = 4 Channels <b>6</b> = 6 Channels <b>8</b> = 8 Channels <b>10</b> = 10 Channels <b>12</b> = 12 Channels	<b>Input Options (Spring Cage Terminal Blocks)</b> <b>A</b> = User Defined with Spring Cage Terminal Blocks* <b>B</b> = Conduit Fitting with Spring Cage Terminal Blocks** <b>C</b> = Nylon Cord Grips with Spring Cage Terminal Blocks <b>N</b> = Nickel-Plated Brass Cord Grips with Spring Cage Terminal Blocks† <b>S</b> = Stainless Steel Cord Grips with Spring Cage Terminal Blocks†	<b>Input Options (Screw Terminal Blocks)</b> <b>G</b> = User Defined with Screw Terminal Blocks* <b>H</b> = Conduit Fitting with Screw Terminal Blocks** <b>I</b> = Nylon Cord Grips with Screw Terminal Blocks <b>K</b> = Stainless Steel Cord Grips with Screw Terminal Blocks† <b>L</b> = Nickel-Plated Brass Cord Grips with Screw Terminal Blocks†	<small>*No punch cuts are provided in the enclosure for cable entry. User may install any fittings required.                  **For use with conduit.                  †Stainless Steel enclosures only.</small>

Backed by our Unconditional Lifetime Warranty

[www.ctconline.com](http://www.ctconline.com) | [sales@ctconline.com](mailto:sales@ctconline.com) | 585-924-5900