

# JQ2A Series




VIBRATION ANALYSIS HARDWARE

2 Socket Mini-MIL Connector with Grounded Backshell for Class 1, Division 2 Locations, Polycarbonate Molded, Permanent Measurements, 250 °F (121 °C) Max Temp

## Product Features

### Grounded Locking Ring for Class 1, Division 2 Installations

- ▶ 2 Socket Mini-MIL Connection for use with CTC Miniature Size Accelerometers
- ▶ Designed to Withstand a Wide Variety of Industrial Applications
- ▶ 316L Stainless Steel Locking Ring for Added Durability and Corrosion Resistance

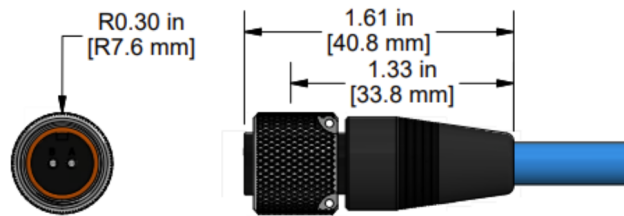

## Specifications

Application	Permanent Mount
Max Temperature	250 °F (121 °C)
Connector Type	2 Socket Mini-MIL
Shell Material	Polycarbonate
Connector Insert Material	Polycarbonate
Rating	IP68
Pin-Out	A = Signal (+) B = Common (-)

**Built to Order**

Backed by our Unconditional Lifetime Warranty

[www.ctconline.com](http://www.ctconline.com) | [sales@ctconline.com](mailto:sales@ctconline.com) | 585-924-5900