

# JQ4A Series



VIBRATION ANALYSIS HARDWARE

4 Socket Mini-MIL Connector, Polycarbonate Molded with Grounded Locking Ring for Class 1, Division 2 Locations, 250 °F (121 °C) Max Temp




## Product Features

Compatible with CTC Hazardous Rated Triaxial Accelerometers

Grounded Locking Ring for Class 1, Division 2 Installations

- ▶ 4 Socket Connection
- ▶ 316L Stainless Steel Locking Ring

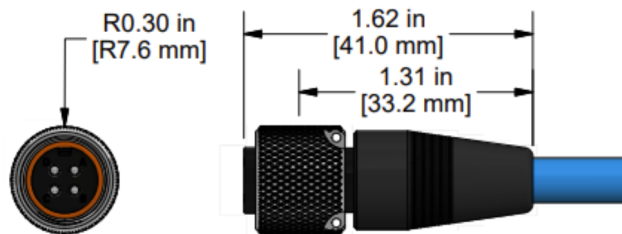

## Specifications

Application	Permanent Mount
Max Temperature	250 °F (121 °C)
Connector Type	4 Socket Mini-MIL
Shell Material	Polycarbonate
Connector Insert Material	Polycarbonate
Rating	IP68
Pin-Out	Socket A = Ch. Y (+), Red Conductor Socket B = Ch. X (+), Green Conductor Socket C = Ch. Z (+), White Conductor Socket D = Common (-), Black Conductor

**Built to Order**

Backed by our Unconditional Lifetime Warranty

[www.ctconline.com](http://www.ctconline.com) | [sales@ctconline.com](mailto:sales@ctconline.com) | 585-924-5900