

JQ4N Series



VIBRATION ANALYSIS HARDWARE


4 Socket Mini-MIL Connector with Grounded Backshell for Class I, Division 2 Locations, Nylon Molded, Permanent Measurements, 250 °F (121 °C) Max Temp

Product Features

Compatible with CTC Hazardous Rated Triaxial Accelerometers

Grounded Locking Ring for Class 1, Division 2 Installations

- ▶ 4 Socket Connection
- ▶ 316L Stainless Steel Locking Ring

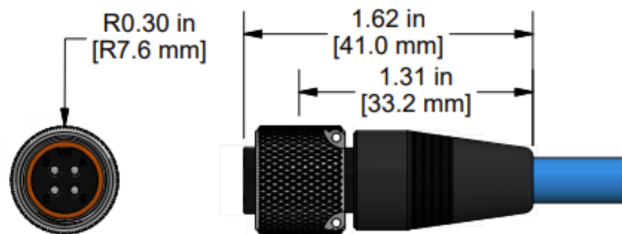

Specifications

Application	Permanent Mount
Max Temperature	250 °F (121 °C)
Connector Type	4 Socket Mini-MIL
Shell Material	Nylon
Connector Insert Material	Nylon
Rating	IP68
Pin-Out	Socket A = Ch. Y (+), Red Conductor Socket B = Ch. X (+), Green Conductor Socket C = Ch. Z (+), White Conductor Socket D = Common (-), Black Conductor

Built to Order

Backed by our Unconditional Lifetime Warranty

www.ctconline.com | sales@ctconline.com | 585-924-5900