

# JV2R Series




VIBRATION ANALYSIS HARDWARE

High Temperature, 2 Socket Mini-MIL Seal-Tight Viton® Boot Connector with PPS Insert, for use with CTC Miniature Industrial 2 Pin Accelerometers, Permanent Mount, 350 °F (177 °C) Max Temp

## Product Features

High Temperature Resistance up to 350 °F (177 °C)

- ▶ 2 Socket Mini-MIL Connection for use with CTC Miniature Size Accelerometers
- ▶ Ideal for Hot, Wet, and Caustic Environments
- ▶ Creates an IP69-Rated Seal

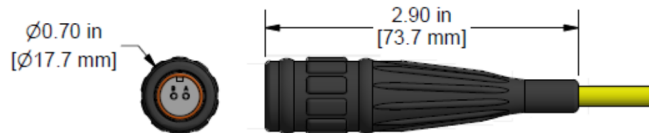

## Specifications

Application	Permanent Mount
Max Temperature	350 °F (177 °C) Max Temp
Connector Type	2 Socket Viton® Seal-Tight Boot
Shell Material	Viton®
Connector Insert Material	PPS
Rating	IP69
Pin-Out	A = Signal (+) Red B = Common (-) Black

**Built to Order**

Backed by our Unconditional Lifetime Warranty

[www.ctconline.com](http://www.ctconline.com) | [sales@ctconline.com](mailto:sales@ctconline.com) | 585-924-5900