

# JV4R Series


High Temperature, 4 Socket Mini-MIL Seal-Tight Viton® Boot Connector with PPS Insert, for use with CTC Triaxial Accelerometers, Permanent Mount, 350 °F (177 °C) Max Temp



## Product Features

High Temperature Resistance up to 350 °F (177 °C)

- ▶ 4 Socket Mini-MIL Connection for use with CTC Triaxial Sensors
- ▶ Ideal for Hot, Wet, and Caustic Environments
- ▶ Creates an IP69-Rated Seal

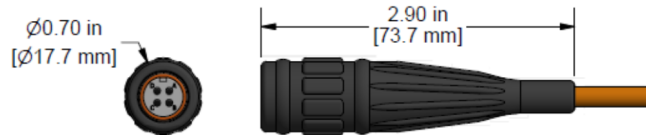

## Specifications

Application	Permanent Mount
Max Temperature	350 °F (177 °C) Max Temp
Connector Type	4 Pin Mini-MIL
Shell Material	Viton®
Connector Insert Material	PPS
Rating	IP69
Pin-Out	Socket A = Ch. Y (+), Red Conductor Socket B = Ch. X (+), Green Conductor Socket C = Ch. Z (+), White Conductor Socket D = Common (-), Black Conductor

**Built to Order**

Backed by our Unconditional Lifetime Warranty

[www.ctconline.com](http://www.ctconline.com) | [sales@ctconline.com](mailto:sales@ctconline.com) | 585-924-5900