

K3CG Series




VIBRATION ANALYSIS HARDWARE

3 Socket MIL-Style Connector with Grounded Backshell and Rubber Bending Strain Relief, Polyurethane Molded, Portable or Permanent Measurements, 250 °F (121 °C) Max Temp

Product Features

Grounded Backshell

- ▶ 316L Stainless Steel Locking Ring
- ▶ Rubber Bending Strain Relief
- ▶ 250 °F Max Temp

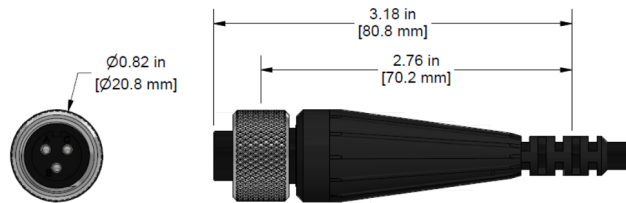

Specifications

Application	Portable or Permanent Measurements
Max Temperature	250 °F (121 °C)
Connector Type	3 Socket MIL-Style
Strain Relief	Rubber Bending Strain Relief
Shell Material	Polyurethane
Connector Insert Material	Polyurethane
Rating	IP68
Pin-Out	A = Signal (+) B = Common (-) C = Signal (+)

Built to Order

Backed by our Unconditional Lifetime Warranty

www.ctconline.com | sales@ctconline.com | 585-924-5900