

# M2C Series




VIBRATION ANALYSIS HARDWARE

5 Socket M12, Polyurethane Molded Strain Relief Connector, with 2 Live Sockets, Portable Measurements, 250 °F (121 °C) Max Temp

## Product Features

- ▶ 5 Socket M12 Connection with 2 Live Sockets, for use with CTC Single-Axis, M12 Connector Exit Sensors
- ▶ Designed to Withstand a Wide Variety of Industrial Applications
- ▶ 316L Stainless Steel Locking Ring for Added Durability and Corrosion Resistance

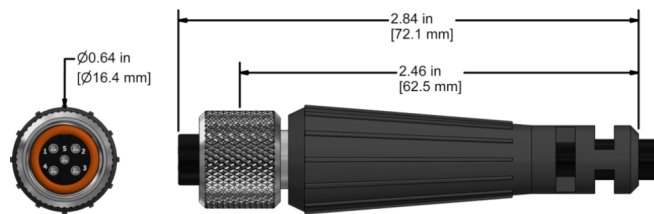

## Specifications

|                           |                                  |
|---------------------------|----------------------------------|
| Application               | Portable Measurement             |
| Max Temperature           | 250 °F (121 °C)                  |
| Connector Type            | 5 Socket M12 Connector           |
| Strain Relief             | Rubber Bending Strain Relief     |
| Shell Material            | Polyurethane Molded              |
| Connector Insert Material | Polycarbonate                    |
| Rating                    | IP68                             |
| Pin-Out                   | 1 = Signal (+)<br>2 = Common (-) |

**Built to Order**

Backed by our Unconditional Lifetime Warranty

[www.ctconline.com](http://www.ctconline.com) | [sales@ctconline.com](mailto:sales@ctconline.com) | 585-924-5900