

M3C3 Series




VIBRATION ANALYSIS HARDWARE

CEMB Compatible, 5 Socket M12 Connector, Single Channel
Tachometer Input, with 3 Live Sockets, Polyurethane Molded, Pin 1
Shield/Drain, Pin 3 & 4 Tachometer/Power (+)

Product Features

- ▶ For Use with CEMB N130 N330 Vibrometer / Balancer
- ▶ Designed to Withstand a Wide Variety of Industrial Applications
- ▶ 316L Stainless Steel Locking Ring for Added Durability & Corrosion Resistance

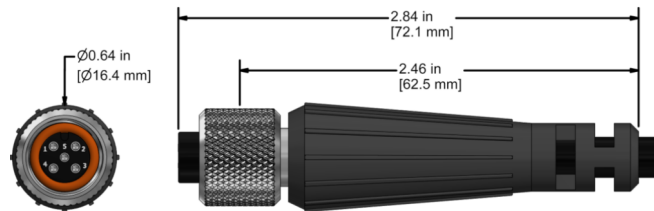

Specifications

Application	Portable Measurements
Max Temperature	250 ° F (121 ° C)
Connector Type	5 Socket M12 Connector
Strain Relief	Rubber Bending
Shell Material	Polyurethane Molded
Connector Insert Material	Polyurethane
Rating	IP68
Pin-Out	Pin 1 Shield/Drain Pin 3 & 4 Tachometer/Power (+)

Built to Order

Backed by our Unconditional Lifetime Warranty

www.ctconline.com | sales@ctconline.com | 585-924-5900