

M4A Series


5 Socket M12, Polycarbonate Molded Connector, for use with 4 Conductor Cables, Permanent Mount, 250 °F (121 °C) Max Temp



VIBRATION ANALYSIS HARDWARE

Product Features

- ▶ 5 Socket M12 Connection with 4 Live Sockets, for use with CTC Triaxial, M12 Connector Exit Sensors
- ▶ Designed to Withstand a Wide Variety of Industrial Applications
- ▶ 316L Stainless Steel Locking Ring for Added Durability and Corrosion Resistance

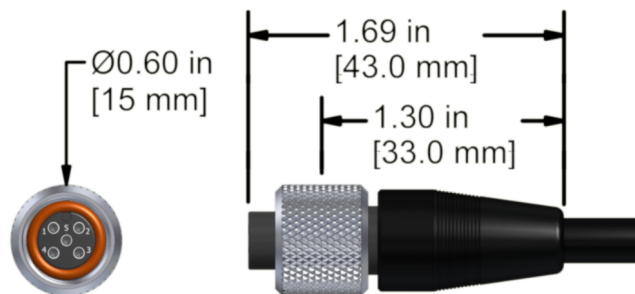

Specifications

Application	Permanent Measurements
Max Temperature	250 °F (121 °C)
Connector Type	5 Socket M12 Connector
Shell Material	Polycarbonate Molded
Connector Insert Material	Polycarbonate
Rating	IP68
Pin-Out	Socket 1 = Ch. Y (+), Red Conductor Socket 2 = Ch. X (+), Green Conductor Socket 3 = Ch. Z (+), White Conductor Socket 4 = Common (-), Black Conductor

Built to Order

Backed by our Unconditional Lifetime Warranty

www.ctconline.com | sales@ctconline.com | 585-924-5900