

M4RTR4 Series

5 Socket M12, PPS Connector, for use with 4 Wire RTD Systems,
Permanent Mount, 392 °F (200 °C) Max Temp




VIBRATION ANALYSIS HARDWARE



Product Features

- ▶ 5 Socket M12 Connection with 4 Live Sockets, for use with CTC TR102 and TR104 RTD Sensors, and 4-Wire RTD Systems
- ▶ Designed to Withstand a Wide Variety of Industrial Applications
- ▶ 316L Stainless Steel Locking Ring for Added Durability and Corrosion Resistance

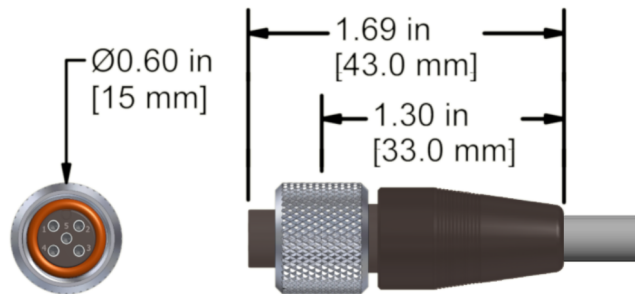

Specifications

Application	Permanent Measurement
Max Temperature	392 °F (200 °C)
Connector Type	5 Socket M12
Shell Material	PPS
Connector Insert Material	PPS
Rating	IP68
Pin-Out	1 = Signal (+) (Red) 2 = Common (-) (Black) 3 = RTD (L1,L2) (Green & White) 4 = RTD (L3,L4) (Blue, Brown)

Built to Order

Backed by our Unconditional Lifetime Warranty

www.ctconline.com | sales@ctconline.com | 585-924-5900