

# M4TR4 Series

5 Socket M12, Polycarbonate Molded Connector, for use with Four-Wire RTD Systems, Permanent Mount, 250 °F (121 °C)




VIBRATION ANALYSIS HARDWARE

## Product Features

For use with CTC RTD Sensors & Four-Wire RTD Systems

- ▶ CTC recommends utilizing Four-Wire RTD Systems over Two-Wire Systems if Four-Wire Systems are compatible with your monitoring system
- ▶ Learn more about Two-Wire vs. Four-Wire RTD Systems here:  
<https://ctconline.com/blog-archive/two-wire-vs-four-wire-rtd-systems/>

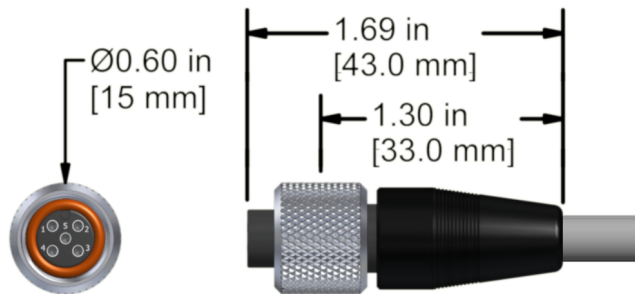

## Specifications

Application	Permanent Measurement
Max Temperature	250 °F (121 °C)
Connector Type	5 Socket M12
Shell Material	Polycarbonate
Connector Insert Material	Polycarbonate
Rating	IP68
Pin-Out	1 = Signal (+) (Red) 2 = Common (-) (Black) 3 = RTD (L1,L2) (Green & White) 4 = RTD (L3,L4) (Blue, Brown)

**Built to Order**

Backed by our Unconditional Lifetime Warranty

[www.ctconline.com](http://www.ctconline.com) | [sales@ctconline.com](mailto:sales@ctconline.com) | 585-924-5900