

MH112-1A



VIBRATION ANALYSIS HARDWARE

Multipurpose 2 Rail Magnet Mounting Base with 1/4-28 Integral Stud, 30 lbs. (14 kg) Pull Strength, 1 in. (25.4 mm) OD, 0.68 in. (17.27 mm) Height




Product Features

Durable 303 Stainless Steel case and mounting stud

High strength Neodymium Iron Boron magnet optimizes pull strength and performance

- ▶ 2 rail mounting system allows measurements on flat and curved surfaces
- ▶ Magnet Leg Rust Prevention Tips:
 - >Store the product in original packaging until it needs to be installed
 - >Ensure the steel is coated or oiled to prevent rusting

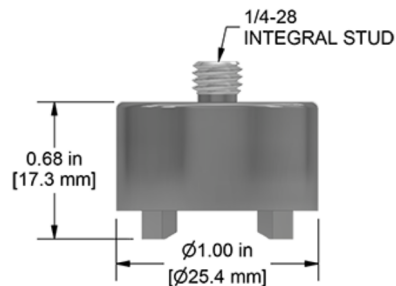

Specifications

Max Temperature	266 °F (130 °C)
Case Material	303 Stainless Steel
Magnet Material	Neodymium Iron Boron
Dimensions	1.00 in. (25 mm) OD, 0.68 in. (17.27 mm) Height
Pull Strength	30 lbs. (14 kg)
Sensor Mounting	1/4-28 Integral Stud

Chemical Compatibilities for Reference

- ▶ Gasoline - A
- ▶ Methanol - A
- ▶ Lubricants - A

Compatibility

- ▶ Compatible with all top exit sensors with 1/4-28 mounting holes

Stock Product

Backed by our Unconditional Lifetime Warranty

www.ctconline.com | sales@ctconline.com | 585-924-5900