

# MH114-3B



VIBRATION ANALYSIS HARDWARE


Electrically Isolated, Multipurpose 2 Rail Magnet Mounting Base with 1/4-28 Blind Tapped Hole, 50 lbs. (23 kg) Pull Strength, 1.4 in. (35.56 mm) OD, 0.75 in. (19.05 mm) Height



## Product Features

### Electrically Isolated

- ▶ Durable 303 Stainless Steel case and mounting hole
- ▶ High strength Neodymium Iron Boron magnet optimizes pull strength and performance
- ▶ 2 rail mounting system allows measurements on flat and curved surfaces

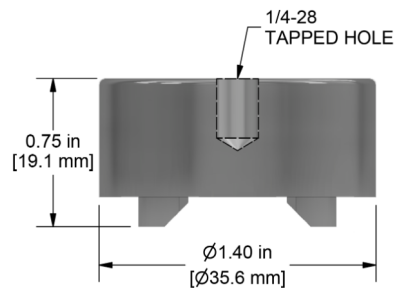

## Specifications

Max Temperature	266 °F (130 °C)
Case Material	303 Stainless Steel
Magnet Material	Neodymium Iron Boron
Dimensions	1.40 in. (36 mm) OD, 0.75 in. (19 mm) Height
Pull Strength	50 lbs. (23 kg)
Sensor Mounting	1/4-28 Mounting Hole

## Chemical Compatibilities for Reference

- ▶ Gasoline - A
- ▶ Methanol - A
- ▶ Lubricants - A

## Compatibility

- ▶ Compatible with all sensors with 1/4"-28 mounting stud or bolt
- ▶ Conversion mounting studs sold separately

**Built to Order**

**Backed by our Unconditional Lifetime Warranty**

[www.ctconline.com](http://www.ctconline.com) | [sales@ctconline.com](mailto:sales@ctconline.com) | 585-924-5900