

# MH114-3T



VIBRATION ANALYSIS HARDWARE


Multipurpose 2 Rail Magnet Mounting Base with 1/4"-28 Blind Tapped Hole and Triaxial Alignment Notch, 50 lbs. (23 kg) Pull Strength, 1.39 in. (35.31 mm) OD, 0.85 in. (21.59 mm) Height



## Product Features

Triaxial alignment notch locates CTC triaxial accelerometers consistently

- ▶ Durable 303 Stainless Steel case and mounting hole
- ▶ High strength Neodymium Iron Boron magnet optimizes pull strength and performance
- ▶ 2 rail mounting system allows measurements on flat and curved surfaces

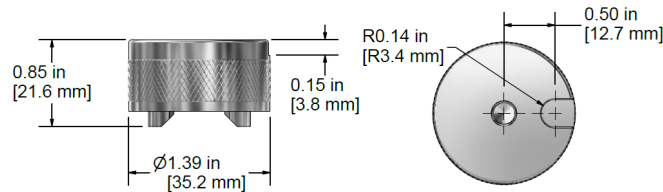

## Specifications

Max Temperature	266 °F (130 °C)
Case Material	303 Stainless Steel
Magnet Material	Neodymium Iron Boron
Dimensions	1.39 in. (35.2 mm) OD, 0.85 in. (21.6 mm) Height
Pull Strength	50 lbs. (23 kg)
Sensor Mounting	1/4-28 Mounting Hole

## Chemical Compatibilities for Reference

- ▶ Gasoline - A
- ▶ Methanol - A
- ▶ Lubricants - A

## Compatibility

- ▶ Compatible with all sensors with 1/4"-28 mounting stud or bolt
- ▶ Conversion mounting studs sold separately

Stock Product

Backed by our Unconditional Lifetime Warranty

[www.ctconline.com](http://www.ctconline.com) | [sales@ctconline.com](mailto:sales@ctconline.com) | 585-924-5900