

# MH122-1A




VIBRATION ANALYSIS HARDWARE

Flat Surface Magnet Mounting Base with 1/4-28 Threaded Blind Tapped Hole, 40 lbs. (18 kg) Pull Strength, 1.00 in. (25.4 mm) OD, 0.68 in. (17.27 mm) Height



## Product Features

- ▶ Durable 17-4 Stainless Steel case
- ▶ High Strength Neodymium Iron Boron magnet optimizes pull strength and performance
- ▶ Maximum frequency response up to 10 kHz when paired with MH133-1A mounting target

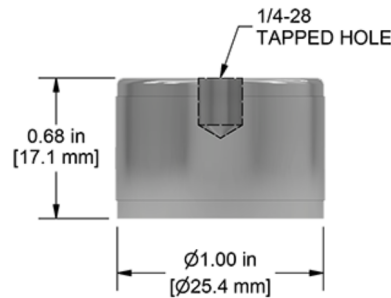

## Specifications

Max Temperature	266 °F (130 °C)
Case Material	17-4 Stainless Steel
Magnet Material	Neodymium Iron Boron
Dimensions	1.00 in. (25.4 mm) OD, 0.68 in. (17.27 mm) Height
Pull Strength	40 lbs. (18 kg)
Sensor Mounting	1/4-28 Mounting Hole

## Chemical Compatibilities for Reference

- ▶ Gasoline - A
- ▶ Methanol - A
- ▶ Lubricants - A

## Compatibility

- ▶ Compatible with all sensors with 1/4"-28 mounting stud or bolt
- ▶ Conversion mounting studs sold separately

Stock Product

Backed by our Unconditional Lifetime Warranty

[www.ctconline.com](http://www.ctconline.com) | [sales@ctconline.com](mailto:sales@ctconline.com) | 585-924-5900