

# MH128-1A



VIBRATION ANALYSIS HARDWARE


Multipurpose 2 Rail Magnet Mounting Base with 1/4"-28 Blind Tapped Hole, 30 lbs. (14 kg) Pull Strength, 1 in. (25.4 mm) OD, 0.94 in. (23.88 mm) Height



## Product Features

2 rail mounting system allows measurements on flat and curved surfaces

- ▶ Durable 303 Stainless Steel case and mounting hole
- ▶ High strength Neodymium Iron Boron magnet optimizes pull strength and performance
- ▶ Magnet Leg Rust Prevention Tips:
  - >Store the product in original packaging until it needs to be installed
  - >Ensure the steel is coated or oiled to prevent rusting

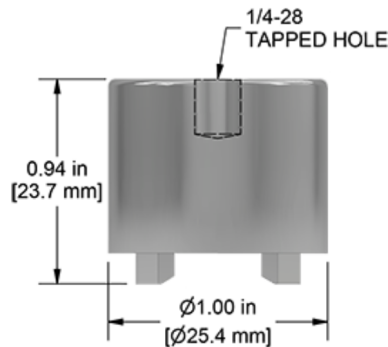

## Specifications

Max Temperature	266 °F (130 °C)
Case Material	303 Stainless Steel
Magnet Material	Neodymium Iron Boron
Dimensions	1.00 in. (25 mm) OD, 0.94 in. (24 mm) Height
Pull Strength	30 lbs. (14 kg)
Sensor Mounting	1/4-28 Mounting Hole

## Chemical Compatibilities for Reference

- ▶ Gasoline - A
- ▶ Methanol - A
- ▶ Lubricants - A

## Compatibility

- ▶ Compatible with all sensors with 1/4"-28 mounting stud or bolt
- ▶ Conversion mounting studs sold separately

Stock Product

Backed by our Unconditional Lifetime Warranty

[www.ctconline.com](http://www.ctconline.com) | [sales@ctconline.com](mailto:sales@ctconline.com) | 585-924-5900