MH130-1T


Mounting Disk with 1/4-28 Blind Tapped Hole and Triaxial Accelerometer Locating Notch, 1.0 in. (25.4 mm) Diameter





Triaxial alignment notch ensures receptacle engagement with CTC triaxial accelerometers

- Provides a consistent location for permanent vibration measurement readings
- Stainless steel construction attracts to portable measurements and corrosion resistance
- Mounted with adhesive no drilling and tapping required

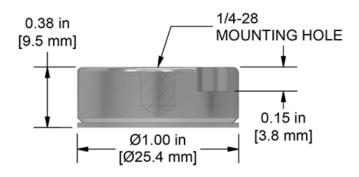

Specifications

Case Material

Sensor Mounting

17-4 Stainless Steel

1/4-28 Blind Tapped Hole

Chemical Compatibilities for Reference

- ▶ Gasoline A
- ▶ Methanol A
- ▶ Lubricants A

Compatibility

▶ Suited for CTC Triaxial accelerometers

Stock Product