

# MX503



VIBRATION ANALYSIS HARDWARE

Triaxial Input & Output Mini-MAXX Box, DLI Compatible 4 Pin Quick Lock Connectors, Aluminum Enclosure, NEMA 4X (IP66) Rated, Sensor Input Options: 1 to 2 Triaxial Output Sensors




## Product Features

Provides a low cost solution that is ideal for harsh environments, including cooling towers and other wet or dusty environments

Internally earth grounded for noise reduction

- ▶ Provides 2 Triaxial connections for Azima DLI DCA/DCX Data Collection for up to 6 Measurement Channels. Compatible with CTC C592, C540, and C342 Connectors.
- ▶ Terminal strip located behind connector panel for easy wiring with grounding
- ▶ Not recommended for airborne or direct exposure to salt water

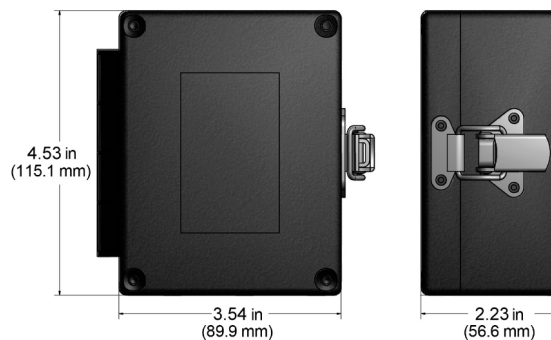

## Specifications

Temperature Range	-58 to 180 °F (-50 to 82 °C)
Enclosure Material	Powder-Coated Aluminum
Inputs	Conduit or Cord Grips Terminal Strip
Outputs	4 Pin Quick Lock Connector
Sensor Input Options	1 - 2 Channels
Rating	NEMA 4X (IP66)
Door Closure	316 Stainless Steel Snap Latch
Dimensions	3.54 x 4.56 x 2.23 in. (90 x 115 x 57 mm)
Resistance	Resistant to Hose Directed Fluid and Corrosion

## Ordering Information

MX503

-	□	□
<b>Enclosure Type</b>	<b>Sensor Inputs (Triax Output)</b>	<b>Input Options</b>
Aluminum Enclosure	1 = 1 Sensors 2 = 2 Sensors	A = User Defined* B = Conduit Fitting** C = Nylon Cord Grips N = Nickel Plated Brass Cord Grips S = Stainless Steel Cord Grips
<p>*No punch outs are provided in the enclosure for cable entry. User may install any fitting required</p> <p>**For use with conduit</p>		

Backed by our Unconditional Lifetime Warranty

[www.ctconline.com](http://www.ctconline.com) | [sales@ctconline.com](mailto:sales@ctconline.com) | 585-924-5900