

# MX504



VIBRATION ANALYSIS HARDWARE

Triaxial Input & Output Mini-MAXX Box, CTC 4 Pin Mini-MIL Connector Compatible, Aluminum Enclosure, NEMA 4X (IP66) Rated, Sensor Input Options: 1 or 2 Triaxial Output Sensors




## Product Features

Provides a low cost solution that is ideal for harsh environments, including cooling towers and other wet or dusty environments

Internally earth grounded for noise reduction

- ▶ Compatible with CTC's J4C Connector. Data collector cables for interface with this enclosure can be built using CTC's Cable Wizard.
- ▶ Terminal strip located behind connector panel for easy wiring with grounding
- ▶ Not recommended for airborne or direct exposure to salt water

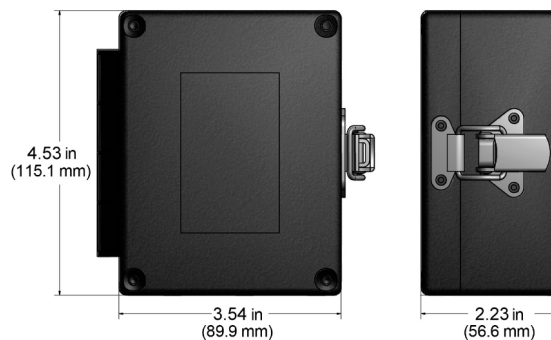

## Specifications

Temperature Range	-58 to 180 °F (-50 to 82 °C)
Enclosure Material	Powder-Coated Aluminum
Inputs	Conduit or Cord Grips Terminal Strip
Outputs	4 Pin mini-MIL Connector
Sensor Input Options	1 - 2 Channels
Rating	NEMA 4X
Door Closure	316 Stainless Steel Snap Latch
Dimensions	3.54 x 4.56 x 2.23 in. (90 x 115 x 57 mm)
Cord Grips	Optional
Resistance	Resistant to Hose Directed Fluid and Corrosion

## Ordering Information

MX504

-



<p><b>Enclosure Type</b></p> <p>Aluminum Enclosure</p>	<p><b>Sensor Inputs (Triaxial Output)</b></p> <p>1 = 1 Sensors 2 = 2 Sensors</p>	<p><b>Input Options</b></p> <p>A = User Defined* B = Conduit Fitting** C = Nylon Cord Grips N = Nickel Plated Brass Cord Grips S = Stainless Steel Cord Grips</p>
--	--	---

\*No punch outs are provided in the enclosure for cable entry. User may install any fitting required

\*\*For use with conduit

Backed by our Unconditional Lifetime Warranty

[www.ctconline.com](http://www.ctconline.com) | [sales@ctconline.com](mailto:sales@ctconline.com) | 585-924-5900