

MX505



VIBRATION ANALYSIS HARDWARE

Triaxial Input & Output Mini-MAXX Box, M12 Style Connector
Compatible, Aluminum Enclosure, NEMA 4X (IP66) Rated, Sensor
Input Options: 1 or 2 Triaxial Output Sensors




Product Features

Provides a low cost solution that is ideal for harsh environments, including cooling towers and other wet or dusty environments

Internally earth grounded for noise reduction

- ▶ Compatible with CTC's M4C Connector. Data collector cables for interface with this enclosure can be built using CTC's Cable Wizard.
- ▶ Terminal strip located behind connector panel for easy wiring with grounding
- ▶ Not recommended for airborne or direct exposure to salt water

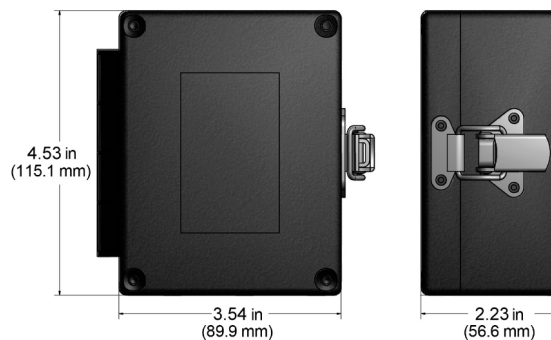

Specifications

Temperature Range	-58 to 180 °F (-50 to 82 °C)
Enclosure Material	Powder-Coated Aluminum
Inputs	Conduit or Cord Grips Terminal Strips
Outputs	4 Pin M12 Connectors
Sensor Input Options	1 - 2 Channels
Rating	NEMA 4X (IP66)
Door Closure	316 Stainless Steel Snap Latch
Dimensions	3.54 x 4.56 x 2.23 in. (90 x 115 x 57 mm)
Cord Grips	Optional
Resistance	Resistant to Hose Directed Fluid and Corrosion

Ordering Information

MX505

-



<p>Enclosure Type</p> <p>Aluminum Enclosure</p>	<p>Sensor Inputs (Triaxial Output)</p> <p>1 = 1 Sensors 2 = 2 Sensors</p>	<p>Input Options</p> <p>A = User Defined* B = Conduit Fitting** C = Nylon Cord Grips N = Nickel Plated Brass Cord Grips S = Stainless Steel Cord Grips</p>
--	--	---

*No punch outs are provided in the enclosure for cable entry. User may install any fitting required

**For use with conduit

Backed by our Unconditional Lifetime Warranty

www.ctconline.com | sales@ctconline.com | 585-924-5900