

# MX702



VIBRATION ANALYSIS HARDWARE

Single Axis Mini-MAXX Box, Enclosed Individual BNC Connectors, Polycarbonate Enclosure, NEMA 4X (IP66) Rated, Sensor Input Options: 1 to 4 Single Output Sensors




## Product Features

Provides a low-cost solution that is ideal for harsh environments, including coastal areas exposed to salt air

Internally earth grounded for noise reduction

- ▶ 316L stainless steel latch and mounting feet
- ▶ Terminal strip located behind BNC panel for easy wiring with grounding

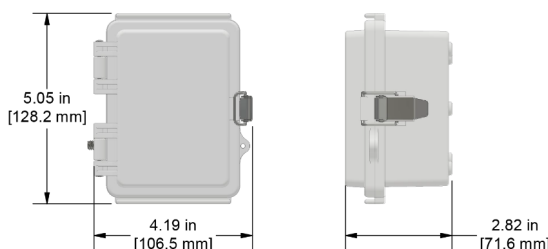

## Specifications

Temperature Range	-58 °F (-50 °C) to 180 °F (82 °C)
Enclosure Material	Polycarbonate
Inputs	Conduit or Cord Grips
Outputs	BNC Jack per Channel, Electrically Isolated
Sensor Input Options	1, 2, 3, and 4 Channel Options
Rating	NEMA 4X
Door Closure	Flip Latch
Dimensions	5.05 x 4.19 x 2.82 in. (128.2 x 106.5 x 71.6 mm)
Cord Grips	Optional
Resistance	Resistant to Hose-Directed Fluid and Corrosion

## Ordering Information

MX702

-



Enclosure Type	Sensor Inputs (Single Output)	Input Options
Polycarbonate Enclosure	1 = 1 Sensors 2 = 2 Sensors 3 = 3 Sensors 4 = 4 Sensors	A = User Defined* B = Conduit Fitting** C = Nylon Cord Grips†
*No punch outs are provided in the enclosure for cable entry. User may install any fitting required **For use with conduit †Only available for up to two inputs		

Backed by our Unconditional Lifetime Warranty

www.ctconline.com | sales@ctconline.com | 585-924-5900