

PXE350P Extended Capacity

Proximity Probe Driver Enclosure with Power Supply Included, Fiberglass, NEMA 4X (IP66) Rated, Channel Options: 1 to 14




Product Features

Accommodates up to 14 Proximity Probe Drivers

Enclosure protects components from dirt, dust, oil, and water

- ▶ For use with all PRO Line Proximity Probe Drivers
- ▶ Power Supply Included: switchable 110/220 VAC to 100/240 VAC to 24VDC
- ▶ Proximity Probe Drivers Sold Separately. All Newly Purchased Drivers Come Fully Installed and Wired

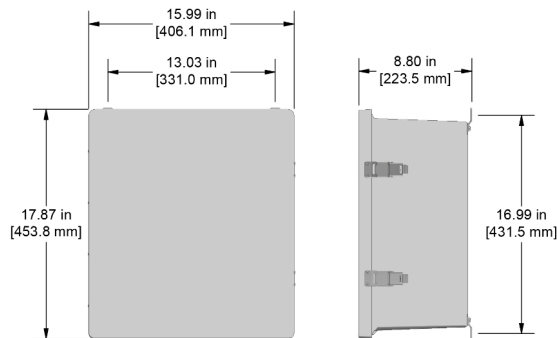

Specifications

| | |
|----------------------|---|
| Temperature Range | 15 to 140 °F (-10 to 60 °C) |
| Enclosure Material | Fiberglass |
| Power | 100 - 240 VAC |
| Inputs | Screw Terminal Block Directly Into Proximity Probe |
| Outputs | BNC Jack for Dynamic Signal and Terminal Blocks |
| Sensor Input Options | 1 - 14 Channels |
| Rating | NEMA 4X (IP66) |
| Door Closure | Snap Latches |
| Dimensions | 15.99 x 17.87 x 8.8 in. (406.1 x 453.8 x 223.5 mm) |
| Resistance | Resistant to Hose Directed Fluid and Corrosion |

Ordering Information

| | | | | | | | |
|---|---|--|---|--|--|---|---|
| PXE | □□□□ | □ | - | □□□□ | - | □ | □ |
| Enclosure Type | Add Ons | Channels | Channels | Enclosure Entry | Output Options | | |
| 350 = Fiberglass Enclosure 450 = Stainless Steel Enclosure | Blank = No Add Ons Included P = Power Supply | 01 = 1 Channel 02 = 2 Channels 03 = 3 Channels 04 = 4 Channels 05 = 5 Channels 06 = 6 Channels 07 = 7 Channels | 08 = 8 Channel 09 = 9 Channels 10 = 10 Channel 11 = 11 Channels 12 = 12 Channel 13 = 13 Channels 14 = 14 Channels | A = User Defined* B = ¾ in. Conduit Fitting** and ½ in. Conduit Fitting for Power† C = Nylon Cord Grips and ½ in. Conduit for Power† | A = User Defined* B = ¾ in. Conduit Fitting** | | |

*No punch outs are provided in the enclosure for cable entry. User may install any fitting required.
**For use with conduit.
†½ in. conduit fitting included on power supply options only

Lifetime Warranty on Materials & Workmanship
www.ctconline.com | sales@ctconline.com | 585-924-5900