


Q2A Series



VIBRATION ANALYSIS HARDWARE


2 Socket MIL-Style Connector with Grounded Backshell for Class I, Division 2 Locations, Polycarbonate Molded, Permanent Measurements, 250 °F (121 °C) Max Temp

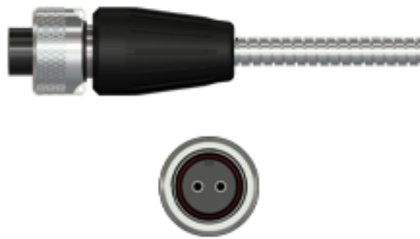

Product Features

Grounded Locking Ring for Class 1, Division 2 Installations

- ▶ 2 Socket Connection for use with CTC Standard Size, Single-Axis Sensors
- ▶ Designed to Withstand a Wide Variety of Industrial Applications
- ▶ 316L Stainless Steel Locking Ring for Added Durability and Corrosion Resistance

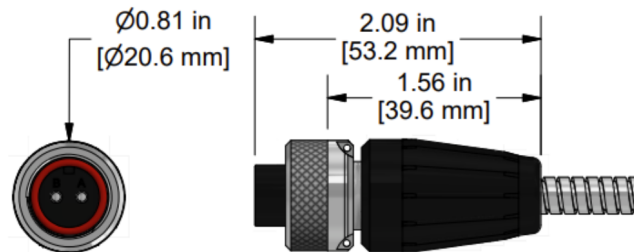

Specifications

| | |
|---------------------------|----------------------------------|
| Application | Permanent Mount |
| Max Temperature | 250 °F (121 °C) |
| Connector Type | 2 Socket MIL-Style |
| Shell Material | Polycarbonate |
| Connector Insert Material | Polycarbonate |
| Rating | IP68 |
| Pin-Out | A = Signal (+) B = Common (-) |

Built to Order

Backed by our Unconditional Lifetime Warranty

www.ctconline.com | sales@ctconline.com | 585-924-5900