

Q3AB Series




3 Socket MIL-Style, Polycarbonate Molded Connector with Grounded Backshell for Class I, Division 2 Locations, Wired for Interface to Biaxial AC949-1D Sensor Wired as X and Z Entry, Permanent Mount, 250 °F (121 °C) Max Temp

Product Features

3 Socket Connector for use with Biaxial AC949 Sensors

Grounded Locking Ring for Class 1, Division 2 Installations

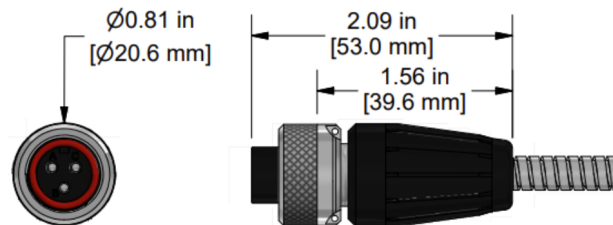

Specifications

Application	Permanent Installation
Max Temperature	250 °F (121 °C)
Connector Type	3 Socket MIL-Style
Shell Material	Polycarbonate Molded
Connector Insert Material	Polycarbonate
Rating	IP68
Pin-Out	A = Signal (+) CTC Green B = Signal (+) CTC White C = Common (-) CTC Black

Built to Order

Backed by our Unconditional Lifetime Warranty

www.ctconline.com | sales@ctconline.com | 585-924-5900