

# R2J Series

2 Pin Mini-MIL Connector with Rubber Bending Strain Relief,  
Polyurethane Molded, 250 °F (121 °C) Max Temp




VIBRATION ANALYSIS HARDWARE



## Product Features

Designed to Build Extension Cables with 2 Conductor, Armor Jacketed Cabling

- ▶ Mates with with CTC 2 Socket Mini-MIL Connectors
- ▶ Designed to Withstand a Wide Variety of Industrial Applications
- ▶ Creates an IP66-Rated Seal

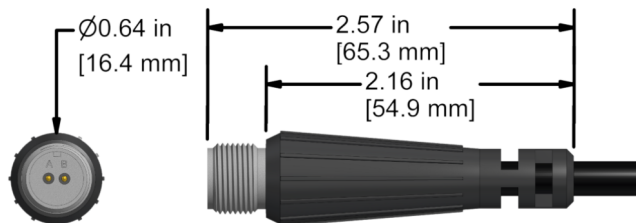

## Specifications

Application	Portable Measurements Permanent Mount
Max Temperature	250 °F (121 °C)
Connector Type	2 Pin Mini-MIL
Shell Material	Polyurethane Molded
Connector Insert Material	Polyurethane
Rating	IP66
Pin-Out	A = Signal (+) B = Common (-)

**Built to Order**

Backed by our Unconditional Lifetime Warranty

[www.ctconline.com](http://www.ctconline.com) | [sales@ctconline.com](mailto:sales@ctconline.com) | 585-924-5900