

R4J Series

4 Pin Mini-MIL Connector with Rubber Bending Strain Relief,
Polyurethane Molded, 250 °F (121 °C) Max Temp




VIBRATION ANALYSIS HARDWARE



Product Features

Designed to Build Extension Cables with 4-Conductor Cabling

- ▶ Mates with CTC 4 Socket Mini-MIL Connectors
- ▶ Designed to Withstand a Wide Variety of Industrial Applications
- ▶ Creates an IP66-Rated Seal

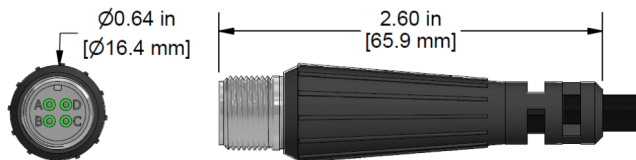

Specifications

Application	Portable Measurements Permanent Mount
Max Temperature	250 °F (121 °C)
Connector Type	4 Pin Mini-MIL
Shell Material	Polyurethane Molded
Connector Insert Material	Polyurethane
Rating	IP66 Rated
Pin-Out	A = Y Axis Signal (+) B = X Axis Signal (+) C = Z Axis Signal (+) D = Common (-)

Built to Order

Backed by our Unconditional Lifetime Warranty

www.ctconline.com | sales@ctconline.com | 585-924-5900