

# TA203 Series

Premium Dual Output Sensor, Temperature & Acceleration, Side Exit 3 Pin Connector, 100 mV/g, 10 mV/°C, ±5%



VIBRATION ANALYSIS HARDWARE



## Product Features

High Performance Sensor


Helps to Detect Bearing Defects and Temperature Changes

- ▶ Temperature (10 mV/°C) and Acceleration (100 mV/g) Outputs in One Sensor via a Standard 3 Pin MIL Connection
- ▶ Popularly Sold with SC300 Series Signal Conditioners with Built-In Temperature Output

### TA203-1A

3 Pin Connector

Conductor	Polarity
A	(+) Signal/Power
B	(-) Common
C	(+) Temperature Voltage




Stock Product

### TA203-2A

CB105 Integral Cable

Conductor	Polarity
Red	(+) Signal/Power
Black	(-) Common
White	(+) Temperature Voltage
Shield	Cable Drain Wire




Built To Order

### TA203-3A

CB218 Amored Integral Cable


Conductor	Polarity
Red	(+) Signal/Power
Black	(-) Common
White	(+) Temperature Voltage
Shield	Cable Drain Wire



Built To Order

Specifications	Standard	Metric	Specifications	Standard	Metric
Part Number	TA203	M/TA203	<b>Environmental</b>		
Sensitivity (±5%)	100 mV/g		Operating Temperature Range	-40 to 250 °F	-40 to 121 °C
Frequency Response (±3dB)	30-600,000 CPM	0.5-10000 Hz	Maximum Shock Protection	5,000 g, peak	
Frequency Response (±10%)	120-300,000 CPM	2.0-5000 Hz	Electromagnetic Sensitivity	CE	
Dynamic Range	± 80 g, peak *Vsource ≥ 22V, 12Vbias		Sealing	IP68	
Temperature Measurement Range	-40 to 250 °F	-40 to 121 °C	Submersible Depth	200 ft.	60 m
Temperature Output	10 mV/°C		<b>Physical</b>		
Temperature Sensor	750 mV = 25 °C (±1)		Sensing Element	PZT Ceramic	
<b>Electrical</b>			Sensing Structure	Shear Mode	
Settling Time	5 seconds		Weight	5.6 oz	160 grams
Voltage Source (IEPE)	18-30 VDC		Case Material	316L Stainless Steel	
Constant Current Excitation	2-10 mA		Connector (Non-Integral)	3 Pin MIL-C-5015	
Spectral Noise @ 10 Hz	14 µg/√Hz		Resonant Frequency	1,260,000 CPM	21000 Hz
Spectral Noise @ 100 Hz	2.3 µg/√Hz		Mounting Torque	2 to 5 ft. lbs.	2.7 to 6.8 Nm
Spectral Noise @ 1000 Hz	2 µg/√Hz		Mounting Hardware Supplied	1/4-28 Captive Bolt	M6x1 Captive Bolt
Output Impedance	<100 ohm		Calibration Certificate	CA10	
Bias Output Voltage	10-14 VDC				
Case Isolation	>10 <sup>8</sup> ohm				

## Typical Frequency Response

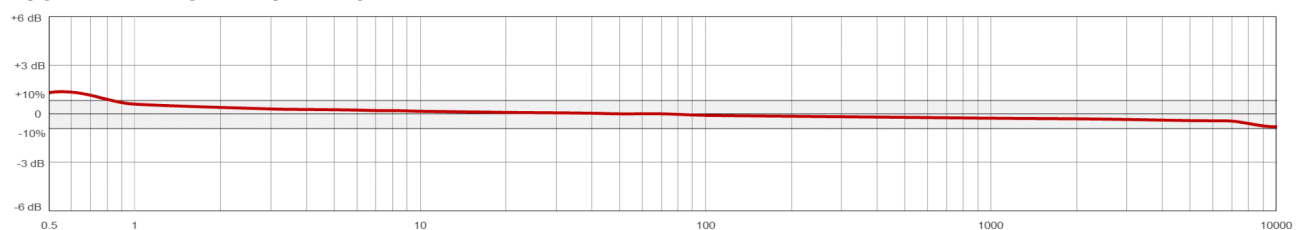

Backed by our Unconditional Lifetime Warranty & Free Annual Recalibration Service

[www.ctconline.com](http://www.ctconline.com) | [sales@ctconline.com](mailto:sales@ctconline.com) | 585-924-5900