

# TA204-M12A Series

Dual Output Sensor, Temperature & Acceleration, Side Exit 4 Pin M12 Connector, 100 mV/g, 10 mV/°C, ±10%



VIBRATION ANALYSIS HARDWARE



## Product Features

High Performance in a Low Cost Sensor


Helps to Detect Bearing Defects and Temperature Changes

- ▶ Temperature (10 mV/°C) and Acceleration (100 mV/g) Outputs in One Sensor via a 4 Pin M12 Connection
- ▶ Popularly sold with SC300 Series Signal Conditioners with built-in Temperature Output

### TA204-M12A

4 Pin Connector


Connector Pin	Polarity
1	(+) Signal/Power
2	(-) Common
3	Not Used
4	(+) Temperature Voltage



Stock Product

Specifications	Standard	Metric	Specifications	Standard	Metric
Part Number	TA204-M12A	M/TA204-M12A	<b>Environmental</b>		
Sensitivity (±10%)	100 mV/g		Operating Temperature Range	-40 to 250°F	-40 to 121°C
Frequency Response (±3dB)	30-600,000 CPM	0.5-10000 Hz	Maximum Shock Protection	5,000 g, peak	
Frequency Response (±10%)	120-300,000 CPM	2.0-5000 Hz	Electromagnetic Sensitivity	CE	
Dynamic Range	± 80 g, peak *Vsource ≥ 22V, 12Vbias		Sealing	IP68	
Temperature Measurement Range	-40 to 250°F	-40 to 121°C	Submersible Depth	200 ft.	60 m
Temperature Output	10 mV/°C		SIL Rating	SIL 2	
Temperature Sensor	750 mV = 25 °C (±1)		<b>Physical</b>		
<b>Electrical</b>			Sensing Element	PZT Ceramic	
Settling Time	5 seconds		Sensing Structure	Shear Mode	
Voltage Source (IEPE)	18-30 VDC		Weight	5.6 oz	160 grams
Constant Current Excitation	2-10 mA		Case Material	316L Stainless Steel	
Spectral Noise @ 10 Hz	14 µg/√Hz		Connector (Non-Integral)	4 Pin M12	
Spectral Noise @ 100 Hz	2.3 µg/√Hz		Resonant Frequency	1,260,000 CPM	21000 Hz
Spectral Noise @ 1000 Hz	2 µg/√Hz		Mounting Torque	2 to 5 ft. lbs.	2.7 to 6.8 Nm
Output Impedance	<100 ohm		Mounting Hardware Supplied	1/4-28 Captive Bolt	M6x1 Captive Bolt
Bias Output Voltage	10-14 VDC		Calibration Certificate	CA10	
Case Isolation	>10 <sup>9</sup> ohm				

## Typical Frequency Response

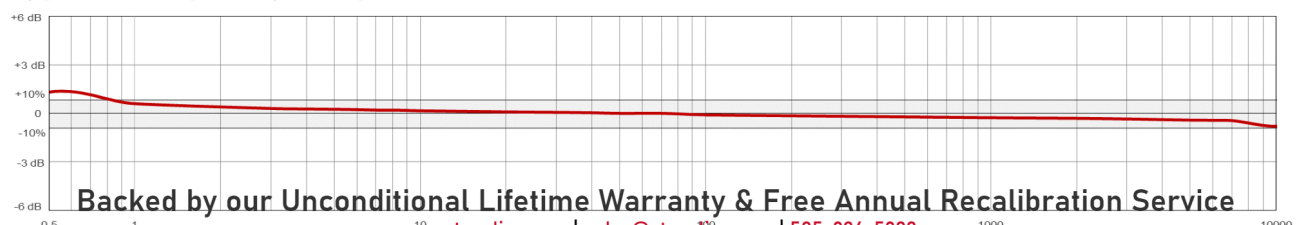

Backed by our Unconditional Lifetime Warranty & Free Annual Recalibration Service

www.ctconline.com | sales@ctconline.com | 585-924-5900