

# TSFA333-IV Series

Inverse Voltage Triaxial Accelerometer, Side Exit 4 Pin Mini-MIL Connector, 100 mV/g, ±15%



VIBRATION ANALYSIS HARDWARE



## Product Features


### Inverse Voltage Triaxial Accelerometer

- ▶ Monitor 3 Channels of Data Simultaneously
- ▶ For Use With Baker Hughes/Commtest Systems
- ▶ Must Use J4A, J4C, J4N, J4P, or V4J Connectors and CB105, CB117, CB119 or CB218 Cables

### TSFA333-IV

#### 4 Pin Connector


Connector Pin	Polarity
A (Axis Y/3)	(-) Signal/Power
B (Axis X/2)	(-) Signal/Power
C (Axis Z/1)	(-) Signal/Power
D	(+) Common/Grid



#### Stock Product

Specifications	Standard	Metric	Specifications	Standard	Metric
Part Number	TSFA333-IV	M/TSFA333-IV	<b>Environmental</b>		
Sensitivity (±15%)	100 mV/g		Operating Temperature Range	-58 to 250°F	-50 to 121°C
Frequency Response (±3dB)	60-390,000 CPM	1,0-6500 Hz	Electromagnetic Sensitivity	CE	
Dynamic Range	± 50 g, peak		Sealing	Welded, Hermetic	
	*Vsource ≤ -20V, 8.5Vbias		Submersible Depth	200 ft.	60 m
<b>Electrical</b>			<b>Physical</b>		
Settling Time	<2.5 seconds		Sensing Element	PZT Ceramic	
Voltage Source (IEPE)	-18 to -30 VDC		Sensing Structure	Shear Mode	
Constant Current Excitation	2-10 mA		Weight	7.1 oz	200 grams
Spectral Noise @ 10 Hz	27 µg/√Hz		Case Material	316L Stainless Steel	
Spectral Noise @ 100 Hz	6.5 µg/√Hz		Connector (Non-Integral)	4 Pin J Connector	
Spectral Noise @ 1000 Hz	2.5 µg/√Hz		Mounting Torque	1 to 2 ft. lbs.	1,4 to 2,7 Nm
Output Impedance	<100 ohm		Mounting Hardware Supplied	1/4-28 Captive Bolt	M6x1 Captive Bolt
Bias Output Voltage	-10 to -14 VDC		Calibration Certificate	CA10	
Case Isolation	>10 <sup>8</sup> ohm				

### Typical Frequency Response

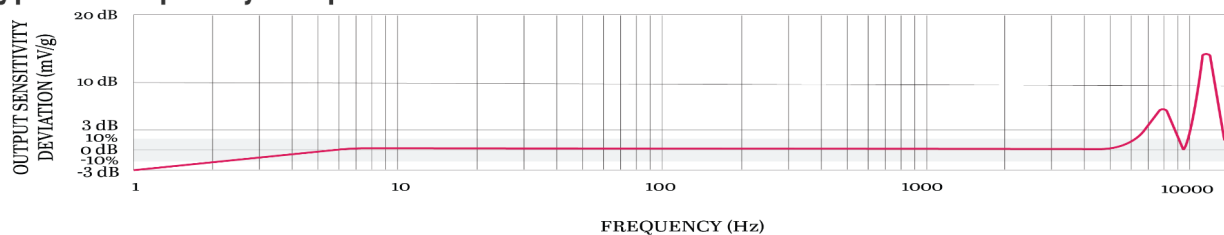

Backed by our Unconditional Lifetime Warranty & Free Annual Recalibration Service

[www.ctconline.com](http://www.ctconline.com) | [sales@ctconline.com](mailto:sales@ctconline.com) | 585-924-5900