

TXFA333-VT Series



VIBRATION ANALYSIS HARDWARE

Low Cost, Low Frequency & Dual Output, Piezo Velocity & Temperature Triaxial Sensor, Side Exit 6 Pin Connector, 500 mV/in/sec, 10 mV/°C, ±15%



Product Features


500 mV/in/sec (20 mV/mm/sec) Sensitivity

Phase conforms to cartesian coordinate system (right hand rule)

TXFA333-VT

Side Exit 6 Pin Connector

Connector Pin	Polarity
1 (Axis Y)	(+) Signal/Power
2 (Axis X)	(+) Signal/Power
3 (Axis Z)	(+) Signal/Power
4	(-) Common/Grid
5	(+) Temperature
6	Not Used




Stock Product

TXFA433-VT

CB123 Integral Cable

Connector Pin	Polarity
1 Red (Axis Y)	(+) Signal/Power
2 Green (Axis X)	(+) Signal/Power
3 White (Axis Z)	(+) Signal/Power
4 Black	(-) Common/Grid
5 Blue	(+) Temperature
6	Not Used




Built To Order

TXFA533-VT

CB629 Armored Integral Cable


Connector Pin	Polarity
1 Red (Axis Y)	(+) Signal/Power
2 Green (Axis X)	(+) Signal/Power
3 White (Axis Z)	(+) Signal/Power
4 Black	(-) Common/Grid
5 Blue	(+) Temperature
6	Not Used



Built To Order

Specifications	Standard	Metric	Specifications	Standard	Metric
Part Number	TXFA333-VT	M/TXFA333-VT	Environmental		
Sensitivity (±15%)	500 mV/in/sec		Operating Temperature Range	-58 to 250 °F	-50 to 121 °C
Frequency Response (±3dB)	120 to 180,000 CPM	2.0 Hz to 3,000 Hz	Maximum Shock Protection	5,000 g, peak	
Dynamic Range	+/-10 in/sec pk *Vsource = 22V, 12Vbias		Electromagnetic Sensitivity	CE	
Electrical			Sealing	Welded, Hermetic	
Settling Time	<4 Seconds		SIL Rating	SIL 2	
Voltage Source (IEPE)	18-30 VDC		Physical		
Constant Current Excitation	2-10 mA		Sensing Element	PZT Ceramic	
Spectral Noise @ 10 Hz	200 µ IPS/√Hz		Sensing Structure	Shear Mode	
Spectral Noise @ 100 Hz	6 µ IPS/√Hz		Weight	13.4 oz	380 grams
Spectral Noise @ 1000 Hz	0.7 µ IPS/√Hz		Case Material	316L Stainless Steel	
Output Impedance	<100 ohm		Mounting Thread	1/4-28	
Bias Output Voltage	10-14 VDC		Connector (Non-Integral)	6 Pin	
Case Isolation	>10 ⁸ ohm		Resonant Frequency	240,000 CPM CPM	4,000 Hz
			Mounting Torque	2 to 5 ft. lbs	2.7 to 6.8 Nm
			Mounting Hardware Supplied	1/4-28 Captive Bolt	M6x1 Captive Bolt
			Calibration Certificate	CA10	

Typical Frequency Response

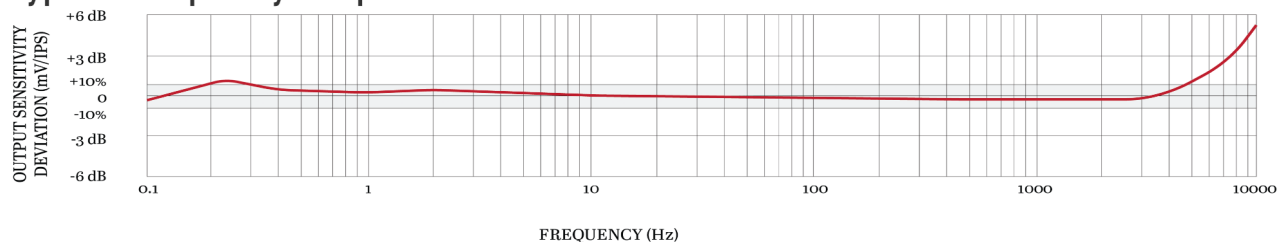

Backed by our Unconditional Lifetime Warranty & Free Annual Recalibration Service

www.ctconline.com | sales@ctconline.com | 585-924-5900