

V3R Series



VIBRATION ANALYSIS HARDWARE

High Temperature 3 Socket MIL-Style Seal-Tight Viton® Boot Connector with PPS Insert, Permanent Mount, 350 °F (177 °C) Max Temp

Product Features


High Temperature Resistance up to 350 °F (177 °C)

- ▶ 3 Socket Connection for use with CTC Dual Output and Negative Voltage Sensors
- ▶ Ideal for Hot, Wet, and Caustic Environments
- ▶ Creates an IP69-Rated Seal



Ø0.89 in
[22.6 mm]

3.19 in
[81.0 mm]

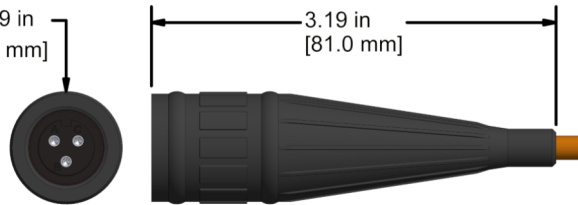

Specifications

Application	Permanent Mount
Max Temperature	350 °F (177 °C)
Connector Type	3 Socket MIL-Style Viton® Seal-Tight Boot
Boot Material	Viton®
Connector Insert Material	Polyphenylene Sulfide (PPS) Insert
Rating	IP69
Pin-Out	A = Signal (+) B = Common (-) C = Signal (+)

Built to Order

Backed by our Unconditional Lifetime Warranty

www.ctconline.com | sales@ctconline.com | 585-924-5900