

V3RB Series




VIBRATION ANALYSIS HARDWARE

High Temperature, 3 Socket MIL-Style Seal-Tight Viton® Boot Connector with PPS Insert, Wired for Interface to Biaxial AC119-1D Sensor Wired as X and Z Entry, Permanent Mount, 350 °F (177 °C) Max Temp

Product Features

- ▶ 3 Socket MIL-Style Seal-Tight Viton® Boot Connector
- ▶ PPS Insert, 350 °F (177 °C) Max Temp
- ▶ Wired for Interface to Biaxial AC119-1D Sensor Wired as X and Z Entry

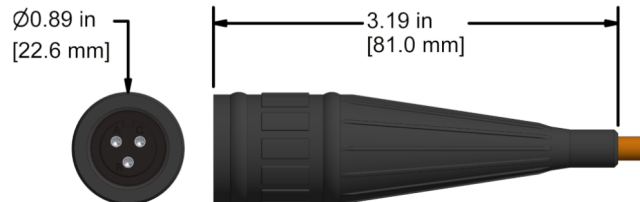

Specifications

Application	Permanent Mount
Max Temperature	350 °F (177 °C)
Connector Type	3 Socket MIL-Style Viton® Seal-Tight Boot
Boot Material	Viton®
Pin Contact Material	Polyphenylene Sulfide (PPS) Insert
Rating	IP69
Pin-Out	A = Signal (+) CTC Green B = Signal (+) CTC White C = Common (-) CTC Black

Stock Product

Backed by our Unconditional Lifetime Warranty

www.ctconline.com | sales@ctconline.com | 585-924-5900