

AC360 Series

Triaxial Accelerometer, Side Exit 4 Pin Mini-MIL Connector, Follows Cartesian Phase Coordinate System, for Modal & ODS Analysis, 100 mV/g, $\pm 5\%$



VIBRATION ANALYSIS HARDWARE



Product Features

Collect 3 Channels of Data Simultaneously for Faster Data Collection


Follows Cartesian Coordinate Phase Configuration (Right Hand Rule)

- ▶ High Performance Triaxial Sensor with High End Frequency Response of 10 kHz (+3dB)
- ▶ Popularly used for Modal Analysis and ODS (Operating Deflection Shape)
- ▶ Compatible with CTC J Series Mini-MIL Connectors

AC360-1D

4 Pin Connector

Connector Pin	Polarity
A (Axis Y/3)	(+) Signal/Power
B (Axis X/2)	(+) Signal/Power
C (Axis Z/1)	(+) Signal/Power
D	(-) Common/Grid




Stock Product

AC360-2D

CB105 Integral Cable

Conductor	Polarity
Red (Axis Y/3)	(+) Signal/Power
Green (Axis X/2)	(+) Signal/Power
White (Axis Z/1)	(+) Signal/Power
Black	(-) Common/Grid




Built To Order

AC360-3D

CB218 Armored Integral Cable


Conductor	Polarity
Red (Axis Y/3)	(+) Signal/Power
Green (Axis X/2)	(+) Signal/Power
White (Axis Z/1)	(+) Signal/Power
Black	(-) Common/Grid



Built To Order

Specifications	Standard	Metric	Specifications	Standard	Metric
Part Number	AC360	M/AC360	Environmental		
Sensitivity ($\pm 5\%$)	100 mV/g		Operating Temperature Range	-65 to 250°F	-54 to 121°C
Frequency Response (± 3 dB)	36-600,000 CPM	0,6-10000 Hz	Electromagnetic Sensitivity	CE	
Frequency Response ($\pm 10\%$)	60-390,000 CPM	1,0-6500 Hz	Sealing	Welded, Hermetic	
Frequency Response ($\pm 5\%$)	480-330,000 CPM	8,0-5500 Hz	Submersible Depth	200 ft.	60 m
Dynamic Range	± 50 g, peak		SIL Rating	SIL 2	
	*Vsouce $\geq 22V$, 12Vbias		Physical		
Electrical			Sensing Element	PZT Ceramic	
Settling Time	<2.5 seconds		Sensing Structure	Shear Mode	
Voltage Source (IEPE)	18-30 VDC		Weight	7.1 oz	200 grams
Constant Current Excitation	2-10 mA		Case Material	316L Stainless Steel	
Spectral Noise @ 10 Hz	27 $\mu g/\sqrt{Hz}$		Connector (Non-Integral)	4 Pin Mini MIL Connector	
Spectral Noise @ 100 Hz	6.5 $\mu g/\sqrt{Hz}$		Resonant Frequency	1,380,000 CPM	23000 Hz
Spectral Noise @ 1000 Hz	2.5 $\mu g/\sqrt{Hz}$		Mounting Torque	1 to 2 ft. lbs.	1,4 to 2,7 Nm
Output Impedance	<100 ohm		Mounting Hardware Supplied	1/4-28 Captive Bolt	M6x1 Captive Bolt
Bias Output Voltage	10-14 VDC		Calibration Certificate	CA10	
Case Isolation	>10 ⁸ ohm				

Typical Frequency Response

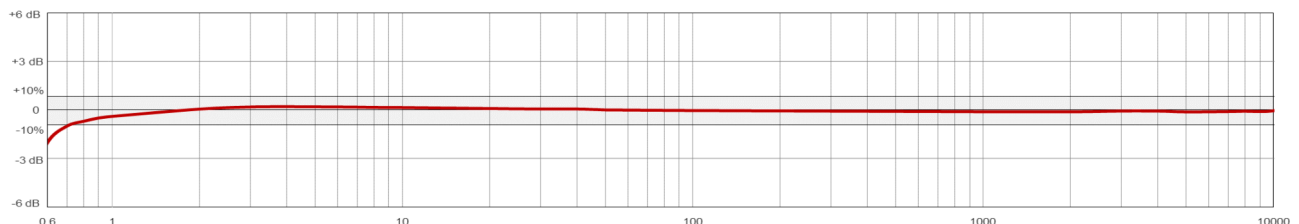

Backed by our Unconditional Lifetime Warranty & Free Annual Recalibration Service

www.ctconline.com | sales@ctconline.com | 585-924-5900